


DSE MOD 242 (971 003)


- Spark gap technology particularly suited for use in d.c. circuits
- Operating state/fault indication by green and red indicator flags in the inspection window
- Easy replacement of protection modules without tools due to module locking system with module release button



Figure without obligation



Basic circuit diagram DSE MOD 60

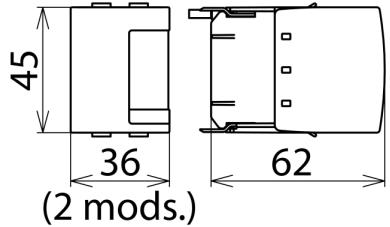

Dimension drawing DSE MOD 242

Spark-gap-based protection module

Type	DSE MOD 242
Part No.	971 003 <small>NEW</small>
Max. continuous operating d.c. voltage (U_C)	242 V
Lightning impulse current (10/350 µs) (I_{imp})	25 kA
Specific energy (W/R)	156.25 kJ/ohms
Weight	108 g
Customs tariff number	85363030
GTIN	4013364144491
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.