


DV M TNS 255 (951 400)


- Prewired spark-gap-based combined lightning current and surge arrester consisting of a base part and plug-in protection modules
- Maximum system availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipment



Figure without obligation



Basic circuit diagram DV M TNS 255

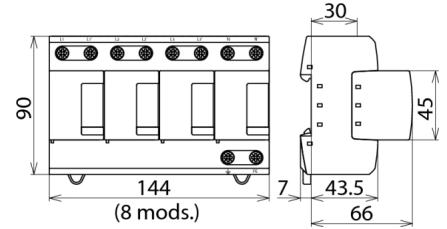

Dimension drawing DV M TNS 255

Modular combined lightning current and surge arrester for TN-S systems

Type	DV M TNS 255
Part No.	951 400
SPD according to EN 61643-11 / IEC 61643-1/-11	Type 1 / Class I
Energy coordination with terminal equipment	Type 1 + Type 2
Energy coordination with terminal equipment ($\leq 5\text{m}$)	Type 1 + Type 2 + Type 3
Nominal a.c. voltage (U_N)	230 / 400 V
Max. continuous operating a.c. voltage (U_C)	255 V
Lightning impulse current (10/350 μs) [L1+L2+L3+N-PE] (I_{total})	100 kA
Specific energy [L1+L2+L3+N-PE] (W/R)	2.50 MJ/ohms
Lightning impulse current (10/350 μs) [L, N-PE] (I_{imp})	25 kA
Specific energy [L,N-PE] (W/R)	156.25 kJ/ohms
Nominal discharge current (8/20 μs) (I_n)	25 / 100 kA
Voltage protection level [L-PE]/[N-PE] (U_p)	$\leq 1.5 \text{ kV} / \leq 1.5 \text{ kV}$
Follow current extinguishing capability a.c. (I_{fi})	50 kA _{rms}
Response time (t_n)	$\leq 100 \text{ ns}$
Follow current limitation/Selectivity	no tripping of a 20 A gL/gG fuse up to 50 kA _{rms} (prosp.)
Max. backup fuse (L) up to $I_K = 50 \text{ kA}_{\text{rms}}$	315 A gL/gG
Max. backup fuse (L-L')	125 A gL/gG
Temporary overvoltage (TOV) [L-N] (U_T)	440 V / 5 sec.
TOV characteristic	withstand
Operating temperature range [parallel]/[series] (T_U)	-40°C...+80°C / -40°C...+60°C
Operating state/fault indication	green / red
Number of ports	1
Cross-sectional area (L1, L1', L2, L2', L3, L3', N, N', PE, \pm) (min.)	10 mm ² solid/flexible
Cross-sectional area (L1, L2, L3, N, PE) (max.)	50 mm ² stranded/35 mm ² flexible
Cross-sectional area (L1', L2', L3', N', \pm) (max.)	35 mm ² stranded/25 mm ² flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	8 module(s), DIN 43880
Approvals	KEMA, VDE, UL, VdS
Extended technical data:	Use in installations with prospective short-circuit currents of more than 50 kA_{rms} (tested by VDE)
- Maximum prospective short-circuit current	100 kA _{rms} (220 kA _{peak})
- Limitation/extinction of mains follow currents	up to 100 kA _{rms} (220 kA _{peak})
- Max. backup fuse (L) up to $I_K = 100 \text{ kA}_{\text{rms}}$	315 A gL/gG
Weight	1,35 kg
Customs tariff number	85363030
GTIN	4013364108158
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.